

Entropy of energy crops and GHG mitigation

W. Schäfer

Animal Production Research Agrifood Research Finland (MTT), Vakolantie 55, FI03400 Vihti, Finland; e-mail: winfried.schafer@mtt.fi

Abstract. The process of photosynthesis generates beside carbon hydrates also complex chemical compounds. The artificial synthesis of such compounds is often impossible or may require high energy input compared to their heat value. In other words, the entropy of energy crops is low compared to fossil fuels. This fact is usually neglected in energy analysis of bio fuels resulting in questionable political decisions concerning renewable energy. The objective of this paper is to demonstrate that the GHG mitigation potential of e.g. fibre crops may be enhanced using them first as raw material for commercial products before processing to fuel at the end of their lifetime. For example, reed canary grass may be used for paper production and after recycling, the used paper can be processed to insulation material in buildings before thermal use. Such a chain of usage trades off both, the low entropy as raw material for pulp and the heat value of the carbon hydrates. A calculation model is used to estimate the reduction of CO₂ equivalents of two options: Alternative A: Production of reed canary grass + processing to fuel for heating. Alternative B: Production of reed canary grass + processing to paper + recycling of paper + processing to insulation material + installation of insulation material in buildings + recycling of insulation material + processing for heating. The results show that alternative B is outclassing alternative A. However, fossil fuels render a higher energy return of investment and are for the time being more competitive than both options.

Key words: Energy analysis, energy crops, GHG mitigation, reed canary grass.

INTRODUCTION

Energy crops are still considered as an important renewable energy source even though there are many doubts whether they may replace fossil fuels sustainably. The question whether the 'cure is worse than the disease' (Doornbosch & Steenblik, 2007) emerged, when the awareness about environmental impacts of energy crop production especially in the tropics reached public awareness (Fritsche et al., 2006; Mathews, 2007; European Environment Agency, 2007; Fargione, 2008; Searchinger et al. 2009, Young, 2009). A living crop decreases the entropy of matter by the process of photosynthesis generating beside carbon hydrates also more complex chemical compounds. Therefore, many crops are used not only for food production but also as raw material for production of commodities (Smeder & Liljedahl, 1996). Energy crops not only compete with food crops and feed crops, but also with fibre crops for industrial products. This fact is often neglected in energy analysis of energy crops. The GHG mitigation potential of fibre crops may be enhanced using them first as raw material for commercial products before processing to fuel at the end of their lifetime. Such a chain of usage trades off both, the low entropy of the fibre and the heat value of the fibre.

MATERIALS AND METHODS

The calculation model to estimate the reduction of CO₂ equivalents of fibre crops uses reed canary grass (RCG) (*phalaris arundinacea*) as an example. Alternative A includes the production and the processing of RCG to fuel for heating. Hadders & Olsson (1997), Mäkinen et al. (2006), and Lötjönen (2009) describe the process of cultivating and processing and the assumptions made.

Alternative B includes the production of RCG, the processing of RCG to paper, recycling of used paper, processing of recycled paper to pulp as insulation material, installation of pulp in buildings, recycling of pulp, and processing the residues to fuel for heating as in alternative A.

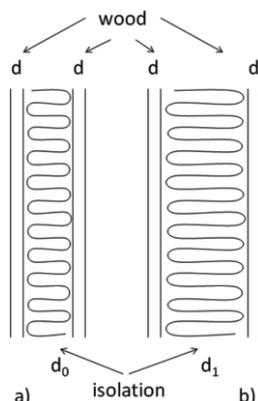


Figure 1. Model wall construction: a) original isolation, b) improved isolation. d_0 = original thickness, d_1 = thickness of wider insulation, d = thickness of the inner and outer wood wall.

The fibre yield is processed to paper with a mean mass efficiency η_y of 65% (Finell, 2003). The process energy of paper production from birch is 38MJ kg^{-1} and the CO₂ eq. 1.1kg kg^{-1} (Gromke & Detzel, 2006). The credit of lower process energy of paper production from RCG compared to pulp from wood is neglected. The recycling efficiency η_p of used paper is estimated to 80% and the mass efficiency η_{pr} of processing used paper to pulp is estimated to 90%. The process energy of pulp production is 3.25MJ kg^{-1} and the CO₂ emissions about 0.2kg kg^{-1} (Rakennustieto, 2000). The heat value of the mass losses for processing may compensate the energy demand for the installation of pulp as insulation material in buildings, recycling, and transport.

To calculate the saved energy using the pulp in buildings for improvement of heat insulation, the model wall or ceiling construction described in Fig. 1 is used. Fig. 1a shows a simple wall element made of two $d = 0.022\text{m}$ thick wood walls filled with pulp insulation. The U-value of the wall insulation declines widening the insulation thickness increment $\Delta d = d_1 - d_0$ in Fig. 1b. Therefore, the saved energy depends on both variables, the original insulation, and the improved insulation. The installation density ρ of the pulp is 30kg m^{-3} and determines together with the thickness of insulation the amount of square meters of the model wall or ceiling to be isolated with

the fibre yield of one hectare. The thermal conductivity of wood λ_w is 0.14 and of pulp λ_p 0.041 W K⁻¹ m⁻¹. The mean temperature in central Finland (Jyväskylä) T_m is -0.87°C during the heating period of 273 days from September to May (Finnish Meteorological Institute, 2011). The room temperature T_r is +20°C. The lifetime of the insulation ν is estimated to 50 years. The saved energy E_S during the lifetime of the wall is then calculated with following equations:

$$E_S = (U_0 - U_1) Y \eta_y \eta_p \eta_{pr} (\rho \Delta d)^{-1} (T_r - T_m) d \nu 0.0864 \text{MJ ha}^{-1} \quad (1)$$

$$U_0 = (2 d_w \lambda_w^{-1} + d_0 \lambda_p^{-1})^{-1} \text{W K}^{-1} \text{m}^{-2} \quad (2)$$

$$U_1 = (2 d_w \lambda_w^{-1} + (d_0 + \Delta d) \lambda_p^{-1})^{-1} \text{W K}^{-1} \text{m}^{-2} \quad (3)$$

At the end of the lifetime, pulp can be used as fuel for burning, assuming a recycling efficiency of 90%. The heat value of pulp may be similar to that of RCG and burning this waste may additionally improve the energy balance. However, often boron is added to the pulp as flame retardant compound, which decreases the lower heat value.

The energy return on investment (EROI) is calculated from the energy input E_{in} and output E_{out} using the following equation:

$$EROI = (E_{out} - E_{in}) E_{in}^{-1}. \quad (4)$$

The CO₂ equivalent emission mitigation from the saved energy depends mainly on the fuel mix used for processing. Any conversion factor for energy conversion into CO₂ equivalents may be used. It will not change the quality of the results.

RESULTS AND DISCUSSION

The *EROI* for heat production of RCG is 11.8MJMJ⁻¹ and the CO₂ eq. balance is 0.015kgMJ⁻¹ (Lötjönen et al., 2009 according to Mäkinen et al., 2006) assuming a dry matter yield of 6Mg ha⁻¹ corresponding to an energy yield of 102GJ ha⁻¹. However, this calculation takes into consideration only the energy input of fuels and fertilisers. The proportion of indirect energy input reached in Danish agriculture in 1999 more than 70% (Rydberg & Haden, 2006) of the total energy input. Thus, a realistic value of the *EROI* is about 6MJ MJ⁻¹ assuming that crop production requires 1/3 of the energy input in the agricultural production. The realistic net energy gain is then about 50GJ ha⁻¹.

The saved energy of alternative B is expressed as a function of the original insulation thickness and the insulation thickness increment Δd as parameter. The original insulation thickness may e.g. range between 0.05 and 0.15m. Then the area enclosed by the points ABCD in Fig. 2 embraces the energy saving potential widening the insulation thickness from 0.01 to 0.15m resulting in final insulation thickness of 0.06 to 0.3m.

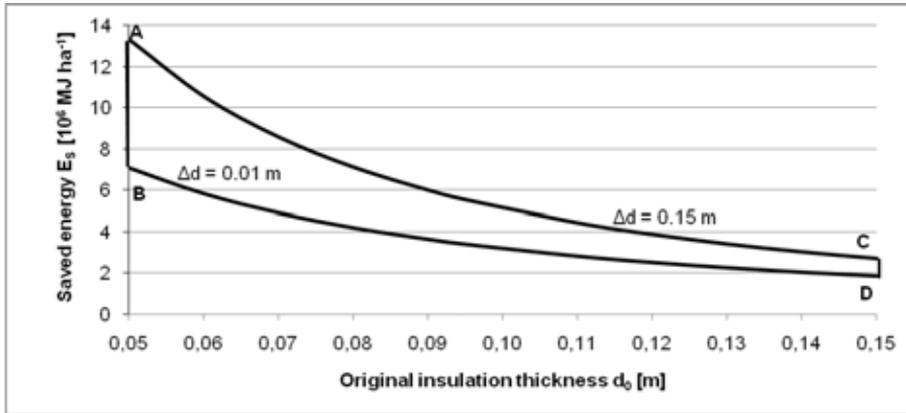


Figure 2. Saved energy of alternative B as a function of the original insulation thickness d_0 and the insulation thickness increment Δd .

Table 1 shows the result of the energy saving calculations. The calculation of CO₂ equivalent savings is given in Table 2. Widening the pulp insulation thickness of a well-insulated wall or ceiling from 0.15m (D) to 0.3m (C) saves 870GJ ha⁻¹, about eight to sixteen times more energy than the heat potential of alternative A. One may object that this energy saving is accumulated over a period of 50 years. However, during the lifetime of 50 years every year the harvest of RCG can be processed to paper and pulp. If the process of paper production is excluded and the yield of RCG is immediately processed to pulp for insulation purposes, energy saving increases even more. The EROI in terms of saved energy is 7.6MJ MJ⁻¹.

Table 1. Calculation of the energy saving potential at CD of Fig. 1.

| Process | Energy | Unit |
|---|----------------|---------------------------|
| Energy input of RCG production | 7,956 | MJ ha ⁻¹ |
| Energy input of paper production: 38MJ kg ⁻¹ 3,900kg ha ⁻¹ - 7,956MJ ha ⁻¹ energy input of RCG production | 140,244 | MJ ha ⁻¹ |
| Energy gain from waste: 6,000 - 3,900MJ ha ⁻¹ = 2,100MJ ha ⁻¹ 17.6MJ kg ⁻¹ | -36,960 | MJ ha ⁻¹ |
| Energy input of pulp production from recycled paper: 2,808kg ha ⁻¹ 3.25MJ kg ⁻¹ | 9,126 | MJ ha ⁻¹ |
| Energy gain from waste: 3,900 - 2,808kg ha ⁻¹ = 1,092kg ha ⁻¹ 17.6MJ kg ⁻¹ | -19,219 | MJ ha ⁻¹ |
| Sum energy input | 101,147 | MJ ha⁻¹ |
| Energy gain by saving energy from additional insulation at CD of Fig. 1 | 870,000 | MJ ha ⁻¹ |
| EROI using RCG as insulation material at CD of Fig. 1 | 7.60 | MJ MJ ⁻¹ |

It is evident that this energy saving is realistic in new construction buildings or under circumstances where the insulation improvement of existing buildings does not

require additional demolition and construction work, e.g. improving the insulation thickness of a ceiling.

Table 2. Calculation of GHG mitigation potential at CD of Fig. 1.

| Process and substitution alternatives | kg CO ₂ eq. ha ⁻¹ |
|---|---|
| Emissions from RCG production 0.015kgCO ₂ eq. MJ ⁻¹ 102,000MJ ha ⁻¹ | 1,530 |
| Emissions from paper production: 1.1kgCO ₂ eq. kg ⁻¹ 3,900kg ha ⁻¹ | 4,290 |
| Emissions from pulp production of recycled paper 0.2kgCO ₂ eq. kg ⁻¹ 2,808kg ha ⁻¹ | 562 |
| Sum emissions | 6,382 |
| Mitigation from saved light fuel oil: 870,000MJ ha ⁻¹ 86 g CO ₂ eq. MJ ⁻¹ | 68,777 |
| Mitigation from saved natural gas: 870,000MJ ha ⁻¹ 69 g CO ₂ eq. MJ ⁻¹ | 53,310 |
| Mitigation from saved district heating: 870,000MJ ha ⁻¹ 61 g CO ₂ eq. MJ ⁻¹ | 46,785 |
| Mitigation from saved electric power: 870,000MJ ha ⁻¹ 190 g CO ₂ eq. MJ ⁻¹ | 158,677 |

Another aspect of energy saving and GHG mitigation is the replacement of artificial insulation material by pulp. The energy requirement of rock wool production is about five times higher. Thus, 5,400kg ha⁻¹ pulp saves additionally 77GJ ha⁻¹.

CONCLUSIONS

The calculation example shows clearly that crops should first be used as food, feed, or fibre before the residues are converted to energy at the end of the lifetime. Producing a table from wood and burning the residues together with this table at the end of its lifetime renders the same energy gain as using this wood for firewood. Because of the second law of thermodynamics, decrease of entropy without energy input is impossible. Only the process of photosynthesis, powered by the sun energy, guarantees low entropy products for humans and animals. The reason why energy crops have been recently used for energy purposes only, may be explained by subsidy policies and by neglecting external cost of energy crop production. Anyway, the energy return of fossil fuels is still higher (between 10 and 20, Pimentel, 2008) and therefore, CO₂ mitigation using renewable energy sources is more expensive for the time being.

ACKNOWLEDGEMENTS:



EUROPEAN UNION
EUROPEAN REGIONAL DEVELOPMENT FUND
INVESTING IN YOUR FUTURE



CENTRAL BALTIC
INTERREG IV A
PROGRAMME
2007-2013

This paper was produced as a result of the ENPOS – Energy positive farm project within The Central Baltic INTERREG IV A Programme 2007-2013 that funds cross-border cooperation projects with a focus on environment, economic growth, as well as attractive and dynamic societies. The sole responsibility for the content of this publication lies with the author. It does not represent the opinion of the European Communities. The European Commission is not responsible for any use that may be made of the information contained therein.

REFERENCES

- Doornbosch, R. & Steenblik, R., 2007. *Biofuels: is the cure worse than the disease?* Ed. Organisation for Economic Co-operation and Development. SG/SD/RT(2007)3. 57 pp. <http://www.oecd.org/dataoecd/15/46/39348696.pdf>
- European Environment Agency, 2007. Estimating the environmentally compatible bioenergy potential from agriculture. *EEA Technical report No 12/2007*, Copenhagen, 136 pp.
- Fargione, J., Hill, J., Tilman, D., Polasky, S. & Hawthorne, P., 2008. Land clearing and the biofuel carbon debt. *Science* **319**, 1235–1237.
- Finell, M., 2003. The use of reed canary-grass (*phalaris arundinacea*) as a short fibre raw material for the pulp and paper industry. *Acta Universitatis Agriculturae Sueciae Agraria* 424. Umeå, 53 pp. http://diss-epsilon.slu.se:8080/archive/00000378/01/Agraria_424_MF.pdf
- Finnish Meteorological Institute, 2011. *Climatological statistics for the normal period 1971–2000*. Jyväskylä (62° 24' N 25° 40' E), Monthly statistics 1971–2000. <http://en.ilmatieteenlaitos.fi/normal-period-1971-2000>
- Fritsche, U. R., Hünecke, K., Hermann, A., Schulze, F., Wiegmann, K. & Adolphe, M., 2006. *Sustainability Standards for Bioenergy*. WWF Germany, Frankfurt am Main, 80 pp.
- Gromke, U. & Detzel, A., 2006. *Ecological comparison of office papers in view of the fibrous raw material*. Institute for Energy and Environmental Research Heidelberg GmbH, Heidelberg, 40 pp. http://www.papiernetz.de/docs/IFEU-Study_english.pdf
- Hadders, G. & Olsson, R., 1997. Harvest of grass for combustion in late summer and in spring. *Biomass and Bioenergy* **12** (3), 171–175.
- Lötjönen, T., Pahkala, K., Vesanto, P. & Hiltunen, M., 2009. Reed canary grass in Finland. In: *Energy from field energy crops – a handbook for energy producers*. Jyväskylä Innovation Oy, Jyväskylä, pp. 14–22.
- Mathews, J., 2007. Biofuels: what a biopact between north and south could achieve. *Energy Policy* **35**, 3550–3570.
- Mäkinen, T., Soimakallio, S., Paappanen, T., Pahkala, K. & Mikkola, H. J., 2006. Greenhouse gas balances and new business opportunities for biomass-based transportation fuels and agrobiomass in Finland. *VTT Tiedotteita - Research Notes* 2357, 134 pp + app. 19 pp. (in Finnish). www.vtt.fi/inf/pdf/tiedotteet/2006/T2357.pdf
- Pimentel, D. 2008. Renewable and solar energy technologies. In: Pimentel D. (ed): *Biofuels, Solar and Wind as Renewable Energy Systems: Benefits and Risks*, Springer, Science+Business Media B. V., p. 1–17.
- Rakennustieto, 2000. RT Environmental Declaration Ekovilla Oy, Ekovilla insulation material. Helsinki, 2pp. http://www.ekovilla.es/gfx/pdf/ekovilla_environmental_declaration_24_es.pdf
- Rydberg, T. & Haden, A., 2006. Energy evaluations of Denmark and Danish agriculture: Assessing the influence of changing resource availability on the organization of agriculture and society. *Agriculture, Ecosystems and Environment* **117**, 145–158.
- Searchinger, T. D., Hamburg, S. P., Melillo, J., Chameides, W., Havlik, P., Kammen, D. M., Likens, G. E., Lubowski, R. N., Obersteiner, M., Oppenheimer, M., Robertson, G. P., Schlesinger, W. H. & Tilman, G. D., 2009. Fixing a critical climate accounting error. *Science* **326**, 527–528.
- Smeder, B. & Liljedahl, S., 1996. Market oriented identification of important properties in developing flax fibres for technical uses. *Industrial Crops and Products* **5**, 14–162.
- Young, A.L., 2009. Finding the balance between food and biofuels. *Environ. Sci. Pollut. Res.* **16**, 117–119.